

# CK-S160MI/CI-65GS

## 1.6 MP 1/2.9" CMOS GigE Area Scan Camera




### Introduction

CK-S160MI/CI-65GS camera adopts Sony® IMX296 sensor to provide high-quality image. It uses GigE interface to transmit non-compressed images in real time, and its max. frame rate can reach 65.2 fps in full resolution.

### Key Feature

- Adopts brand new design to reduce power consumption.
- Compact design with mounting holes on panels for flexible mounting from 4 sides.
- Supports noise reduction and color correction matrix function.
- Supports auto or manual adjustment for gain, exposure time, LUT, Gamma correction, white balance, etc.
- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard.

### Dimension

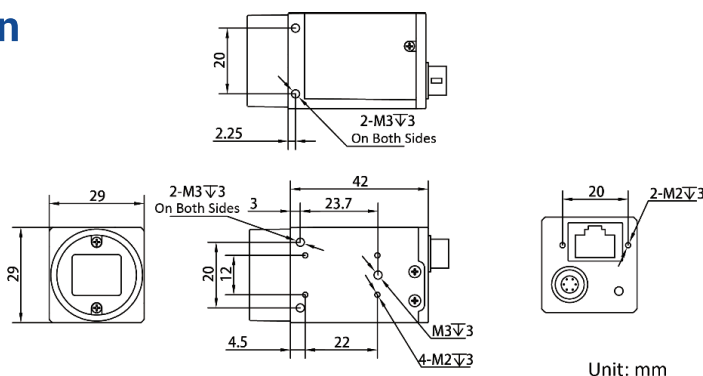


### Available Model

- Mono camera: CK-S160MI-65GS
- Color camera: CK-S160CI-65GS


### Applicable Industry

SMT/ PCB AOI, consumer electronics, electrical semiconductor, image measuring, etc.

### Sensor Quantum Efficiency

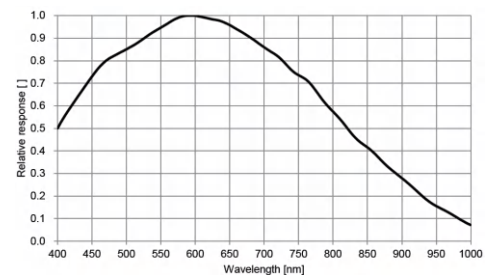

CK-S160MI-65GS

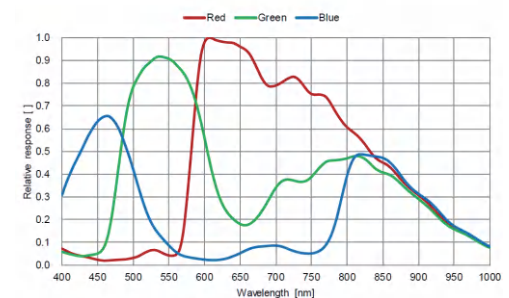

CK-S160CI-65GS

## Specification

Model	CK-S160MI-65GS		CK-S160CI-65GS
Camera			
Sensor type	CMOS, global shutter		
Sensor model	Sony® IMX296		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/2.9"		
Resolution	1440 × 1080		
Max. frame rate	65.2 fps @ 1440 × 1080		
Dynamic range	74 dB		
SNR	41 dB		
Gain	0 dB to 24 dB		
Exposure time	UltraShort exposure mode: 1 μs to 14 μs		
	Standard exposure mode: 15 μs to 10 sec		
Exposure mode	Off/Once/Continuous exposure mode		
Mono/color	Mono	Color	
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8	
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4		
Decimation	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4		
Reverse image	Supports horizontal and vertical reverse image output		
Electrical features			
Data interface	Gigabit Ethernet, compatible with Fast Ethernet		
Digital I/O	6-pin Hirose connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).		
Power supply	9 VDC to 24 VDC, supports PoE		
Power consumption	Typ. 2.4 W @ 12 VDC	Typ. 2.5 W @ 12 VDC	
Mechanical			
Lens mount	C-mount		
Dimension	29 mm × 29 mm × 42 mm (1.1" × 1.1" × 1.2")		
Weight	Approx. 100 g (0.22 lb.)		
Ingress protection	IP40 (under proper lens installation and wiring)		
Temperature	Working temperature: −30 °C to 60 °C (−22 °F to 140 °F) Storage temperature: −30 °C to 70 °C (−22 °F to 158 °F)		
Humidity	20% RH to 80% RH (no condensation)		
General			
Client software	CKVisionBuilder or third-party software meeting with GigE Vision Protocol		
Operating system	32/64-bit Windows 7/10, 32/64-bit Linux		
Compatibility	GigE Vision V2.0, GenICam		
Certification	CE, RoHS, KC		

