

CK-RNE2-135M/CU-208GS

1. 35 MP CMOS USB3.0 Area Scan Camera

Features

- Trigger mode: Frame Start
- ROI, Exposure, Auto Exposure, Gain, Auto Gain
- Decimation, Binning, Black Level and Defect Pixel Correction
- User Set Control
- Robust full metal housing and optional lockable devices
- Support Remove Parameter Limit to expand the range of exposure, gain and so on
- 16KB data storage area for saving algorithm coefficients and parameter configuration

Applications

Suitable for machine vision applications such as industrial inspection, medical, scientific research, education and so on.

I/O Interface




Pin	Definition	Description
1	Line0+	Opto-isolated input +
2	GND	GPIO GND
3	Line0-	Opto-isolated input -
4	NC	NC
5	Line2	GPIO input/output
6	Line3	GPIO input/output
7	Line1-	Opto-isolated output -
8	Line1+	Opto-isolated output +

Models


Mono: CK-RNE2-135MU-208GS
Color: CK-RNE2-135CU-208GS



Spectral Response

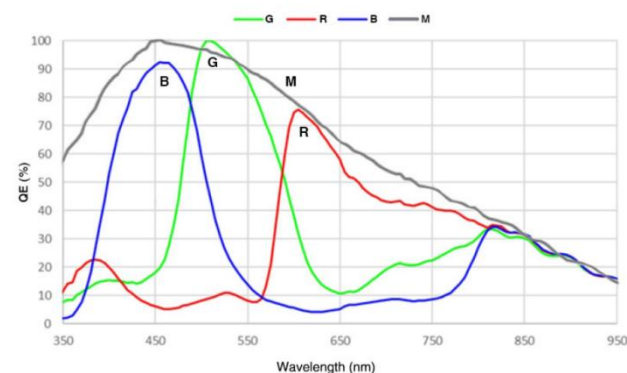

Technical Drawing

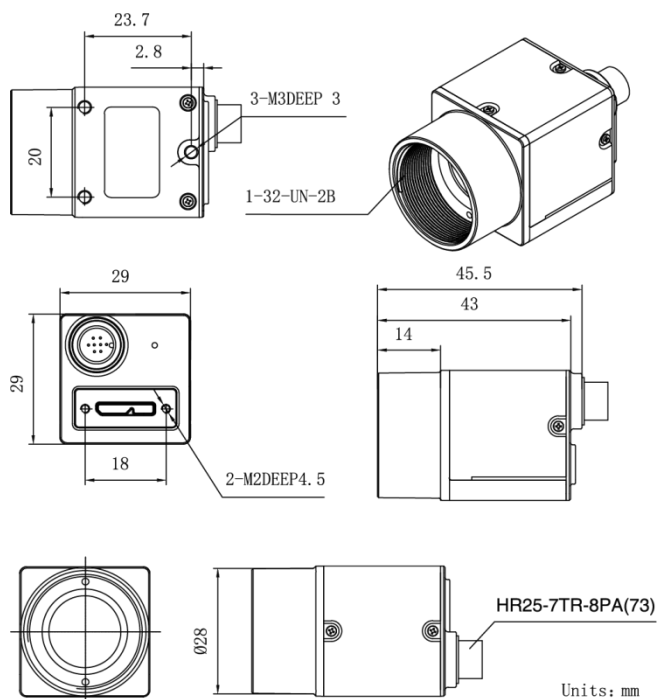

Specifications

Model	CK-RNE2-135CU-208GS	CK-RNE2-135MU-208GS
Resolution	1280(H) × 1024(V)	
Sensor	SmartSens SC130GS Global shutter CMOS	
Sensor Format	1/2.7"	
Pixel Size	4.0μm × 4.0μm	
Frame Rate	208.5 fps	
ADC	10 bit	
Pixel Bit Depth	8 bit, 10 bit	
Mono/Color	Color	Mono
Pixel Formats	Bayer RG8 / Bayer RG10	Mono8 / Mono10
SNR	38.96 dB	39.19 dB
Exposure Time	Standard: 8μs ~ 1s, Actual Steps: 2 row periods	
Gain	0dB ~ 16dB; Default: 0dB, Steps: 0.1dB	
Binning	1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4	
Decimation	Sensor: 1×1, 1×2, 2×1, 2×2	
Synchronization	Hardware trigger , software trigger	
Acquisition Mode	Continuous, Software trigger, Hardware trigger	
Reverse X/Y	Reverse X/Y	
I/O Interface	1 input and 1 output with opto-isolated, 2 programmable GPIOs	
Data Interface	USB3.0	
Power Supply	Power through USB3.0 interface	
Typical Power	2.06 W @ 5 VDC	
Operating Temp.	0° C ~ +45° C	
Storage Temp.	-20 ° C~ +70° C	
Operating Humidity	10% ~ 80%	
Lens Mount	C / CS	
Dimensions	29(W) × 29(H) × 45.5(L) mm	
Weight	65 g	
Software	CKVisionBuilder or support USB3 Vision protocol software	
OS	32bit / 64bit Windows , Linux , Android , ARMv7 , ARMv8	

