


Specifications

CK-SDTCM120-64H-AL

High-precision dual telecentric lens

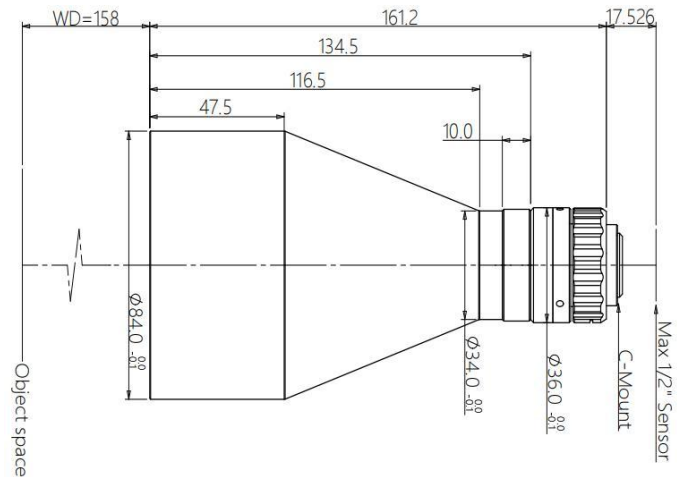

Lens Features

- The ultimate bi-telecentric design with excellent imaging quality
- FOV from 26mm to 300mm, to meet the needs of different markets
- Supports various C-mount industrial cameras from 1/2.5"~1.1"
- Large aperture, high telecentricity, ultra-low distortion, and large depth of field, meeting high-end system requirements

Optical parameters

Field of View (Φ mm)	64
Magnification $\beta(x)$	0.125
Working distance (mm)	158 \pm 3
CCD size (Φ mm)	8.0(1/2")
F/#	4.2
MTF30(lp/mm)	>220
Depth of field (mm)	\pm 28.2@F11
Image distortion (% max)	<0.1
Telecentricity ($^{\circ}$ max)	<0.1
Object distance I/O(mm)	337 \pm 3

Supporting light source

Parallel (telecentric) lights
SDTCL-64H-xW-y
Beam diameter 64mm



Mechanical parameters

Camera interface	C
Overall length of lens (mm)	161.2
Net weight (kg)	0.8

Field of View (mm x mm)

1/2.5" 9P001/31 (5.7x4.28)	45.6x34.2
1/2.3" 9J003 (6.44x4.62)	51.5x37.0