

CK-REN2X-2622M/CU-15GS

26.2MP CMOS USB3.0 Area Scan Camera



Features

- Trigger mode: Frame Start /Frame Burst Start
- Support Gamma, Binning, Decimation, Digital Shift
- Support Black Level, Auto Black Level
- Support Flat Field Correction and Static Defect Pixel Correction
- Color models support Light source preset, Color Transformation Control and Saturation
- Monochrome models support Noise Reduction and Sharpness
- Programmable LUTs and User Set Control
- Support Timer and Counter
- Support Remove Parameter Limit to expand the range of exposure, gain, and so on
- 16KB data storage area for saving algorithm coefficients and parameter configuration

Applications


Suitable for machine vision applications such as industrial inspection, medical, scientific research, education and so on.

I/O Interface



Pin	Definition	Description
1	Line 0+	Opto-isolated input +
2	GND	GPIO GND
3	Line 0-	Opto-isolated input -
4	NC	NC
5	Line 2	GPIO input/output
6	Line 3	GPIO input/output
7	Line 1-	Opto-isolated output -
8	Line 1+	Opto-isolated output +

Spectral Response

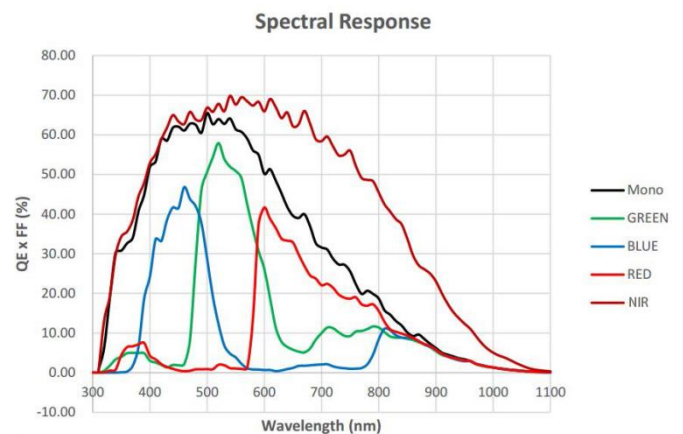

Models

Mono: CK-REN2X-2622MU-15GS
Color: CK-REN2X-2622CU-15GS

Specifications

Model	CK-REN2X-2622CU-15GS	CK-REN2X-2622MU-15GS
Resolution	5120(H) × 5120(V)	
Sensor	GMAX0505 Global shutter CMOS	
Sensor Format	1.1"	
Pixel Size	2.5μm × 2.5μm	
Frame Rate	15.1 fps	
ADC	12 bit	
Pixel Bit Depth	8 bit, 12 bit	
Mono/Color	Color	Mono
Pixel Formats	Bayer GB8 / Bayer GB12	Mono8 / Mono12
SNR	36.18 dB	36.15 dB
Exposure Time	Standard: 11μs ~ 1s, Actual Steps: 1μs	
Gain	0dB ~ 16dB; Default: 0dB, Steps: 0.1dB	
Binning	1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4	
Decimation	Horizontal FPGA, Vertical Sensor: 1×1, 1×2, 1×4, 2×1, 2×2, 2×4, 4×1, 4×2, 4×4	
Synchronization	Hardware trigger, software trigger	
Acquisition Mode	Single frame, Continuous, Software trigger, Hardware trigger	
Reverse X/Y	Reverse X/Y	
I/O Interface	1 input and 1 output with opto-isolated, 2 programmable GPIOs	
Data Interface	USB3.0	
Power Supply	Power over USB3.0	
Typical Power	3.74 W @ 5 VDC	
Operating Temp.	0°C ~ +45°C	
Storage Temp.	-20°C ~ +70°C	
Operating Humidity	10% ~ 80%	
Lens Mount	C / CS	
Dimensions	36(W) × 31(H) × 38.8(L) mm (without lens adapter or connectors)	
Weight	66 g	
Software	CKVisionBuilder or third-party software meeting with GigE Vision Protocol	
OS	32bit / 64bit Windows, Linux, Mac OS	



Technical Drawing

