

CK-RNE2-240M/CI-48GS

2.4 MP CMOS GigE Area Scan Camera




Features

- Trigger mode: Frame Start / Frame Burst Start
- Decimation, Binning, Reverse X/Y
- Gamma, Black Level, LUTs and User Set Control
- Light source preset, Color Transformation Control and Saturation (color models)
- Digital Shift, Static Defect Pixel Correction and Acquisition Burst Mode (color models)
- Support Remove Parameter Limit to expand the range of exposure, gain, white balance, and so on
- 16KB data storage area for saving algorithm coefficients and parameter configuration

Applications


Suitable for machine vision applications such as industrial inspection, medical, scientific research, education and so on.

I/O Interface

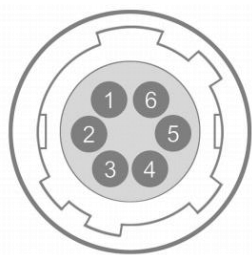

Pin	Definition	Description
1	POWER_IN	Camera external power, +12V DC~+24V DC
2	Line0+	Opto-isolated input +
3	Line2	GPIO input/output
4	Line1+	Opto-isolated output +
5	Line0-/Line1-	Line0-: Opto-isolated input - Line1-: Opto-isolated output -
6	GND	PWR GND & GPIO GND

Spectral Response

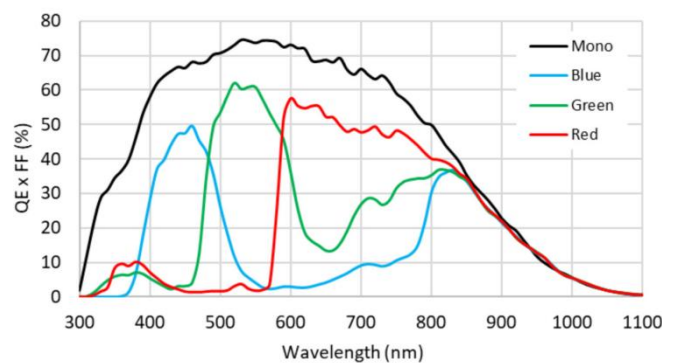

Models


Mono: CK-RNE2-240MI-48GS
Color: CK-RNE2-240CI-48GS

Specifications


Model	CK-RNE2-240CI-48GS		CK-RNE2-240MI-48GS	
Resolution	2048(H) × 1200(V)			
Sensor	Gpixel GMAX4002 Global shutter CMOS			
Sensor Format	1/1.7"			
Pixel Size	4.0μm × 4.0μm			
Frame Rate	47.87fps (Max. frame rate: 73.1fps @ Acquisition Burst Mode)			
ADC	12 bit			
Pixel Bit Depth	8 bit, 12 bit			
Mono/Color	Color		Mono	
Pixel Formats	Bayer GB8 / Bayer GB12		Mono8 / Mono12	
SNR	38.96 dB	38.96 dB	38.90 dB	38.90 dB
Exposure Time	Standard: 5μs ~ 1s, Actual Steps: 1μs			
Gain	0dB ~ 24dB; Default: 0dB, Steps: 0.1dB			
Binning	1×1, 1×2, 1×4, 2×1, 2×2, 2×4		Sensor: 1×1, 1×2, 2×1, 2×2	
Decimation	Horizontal FPGA, Vertical Sensor: 1×1, 1×2, 1×4, 2×1, 2×2, 2×4			
Synchronization	Hardware trigger, software trigger			
Acquisition Control	Single frame, Continuous, Software trigger, Hardware trigger, Acquisition burst			
Reverse X/Y	Reverse X/Y			
I/O Interface	1 input and 1 output with opto-isolated, 1 programmable GPIO			
Data Interface	GigE	GigE PoE	GigE	GigE PoE
Power Supply	12VDC-10% ~ 24VDC+10% supplied via the camera's Hirose connector PoE is optional (Power over Ethernet, IEEE802.3af compliant)			
Typical Power	2.45W @ 12VDC	3.25W @ 12VDC 3.55W @ PoE	2.45W @ 12VDC	3.25W @ 12VDC 3.55W @ PoE
Operating Temp.	0°C ~ +45°C			
Storage Temp.	-20°C ~ +70°C			
Operating Humidity	10% ~ 80%			
Lens Mount	C / CS			
Dimensions	No PoE: 29(W) × 29(H) × 29(L) mm (without lens adapter or connectors) PoE: 29(W) × 29(H) × 40.3(L) mm (without lens adapter or connectors)			
Weight	No PoE: 65 g; PoE: 75 g			
Software	CKVisionBuilder or third-party software meeting with GigE Vision Protocol			
OS	32bit / 64bit Windows, Linux, Mac OS			



Technical Drawing

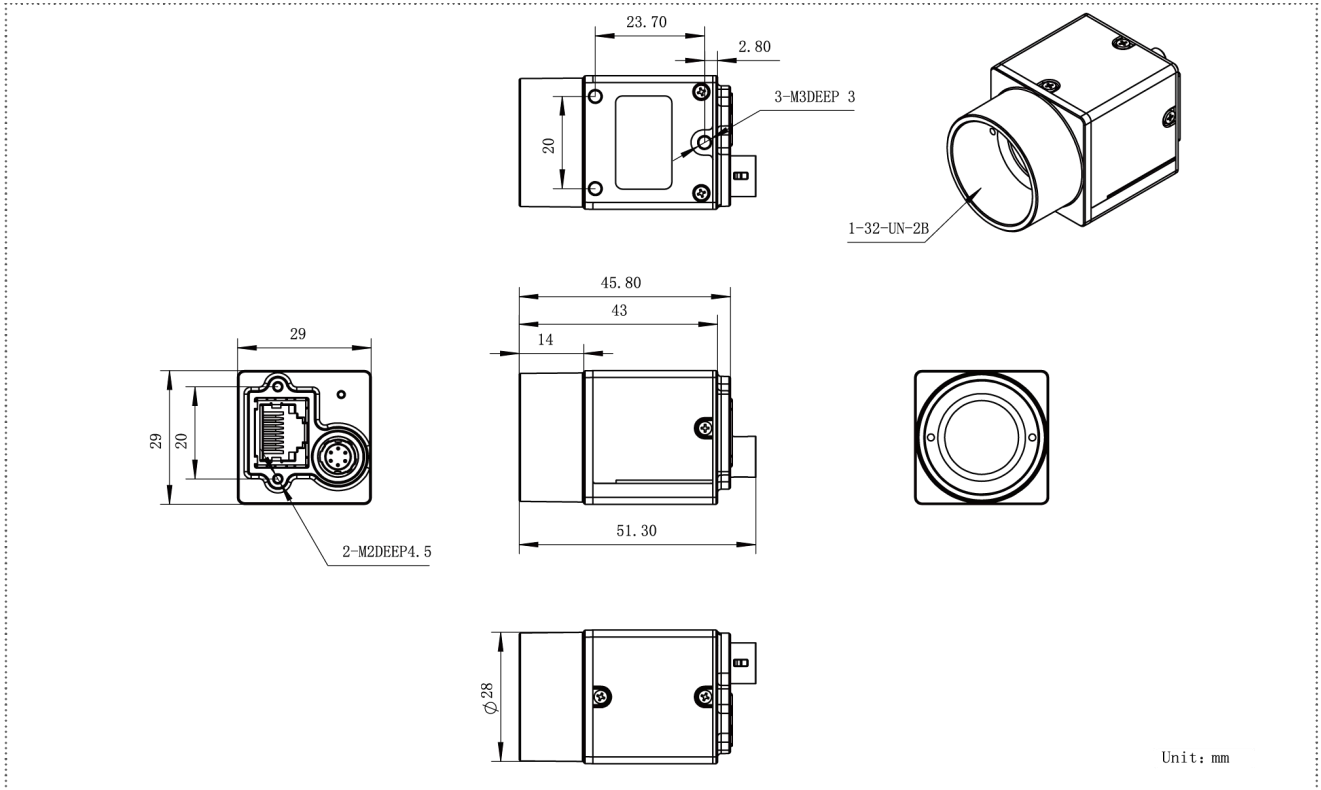

Size A No PoE

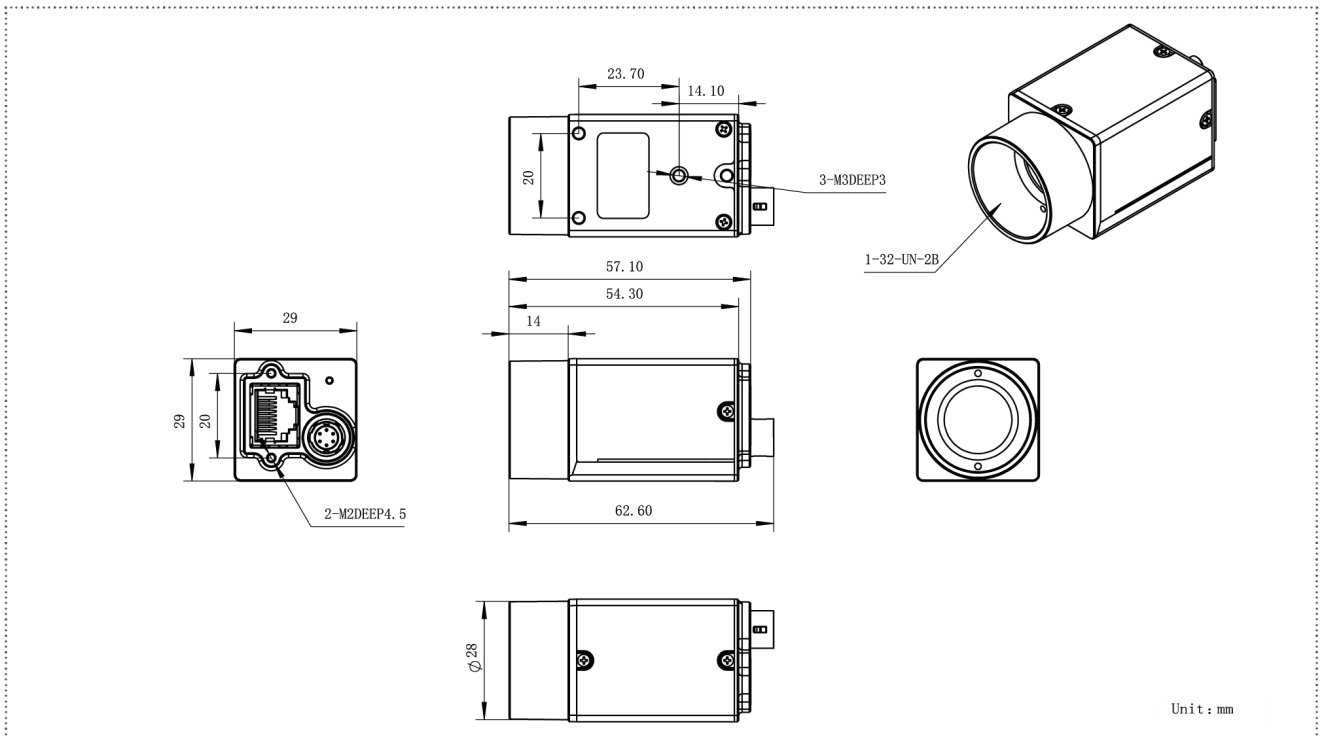

Size B PoE

